RF5-N30 FLAT STAIR NOSING

The RF5-N30 Non-Slip Anodized Stair Nosings provide step edge color contrast, long-lasting anti-slip protection and beautiful appearance. It provides an affordable way to renovate and modernize worn stairways and improve stairway safety. The RF5-N30 can be used on a range of substrates including concrete, timber, tiles, steel and checker plate stairs.

PRODUCT COLORS

Black	Grey	Yellow
RF5170	RF5160	RF5150

PRODUCT DIMENSIONS

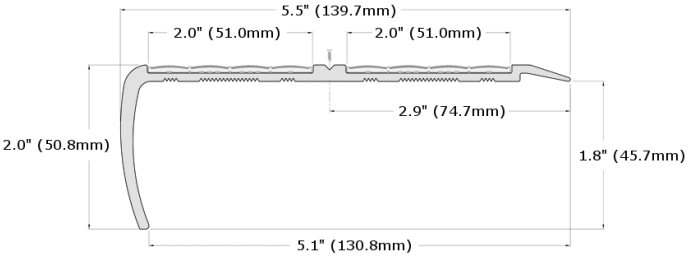

ENGINEERED FOR DURABILITY

- The hard-wearing silicon carbide non-slip material is integrally bonded to the aluminum substrate. Thousands of people can walk on it with no signs of wear and tear.
- The thick anodized finish is aesthetically pleasing, prevents corrosion, and is extremely hard and abrasion resistant. The anodized aluminum surface is harder than pure aluminum, second only to diamonds hard crystalline structure.

STEP EDGE SAFETY

- The color contrasting the non-slip material provides step edge visibility.

GENERAL INFORMATION

- Install with polyurethane adhesive and mechanical fasteners, or adhesive only.
- Supplied with pre-drilled countersunk holes. Includes stainless steel fasteners and concrete nylon anchors. Standard location is 2" from each end and approx. 12" apart.
- Available in cut to length sizes. (Tolerance +or- 1/8") Standard lengths are 8ft and 10ft.
- Inserts are supplied unattached. Inserts are installed over the mechanical fasteners using a polyurethane adhesive (included). Inserts can be cut using a shear. Aluminum nosings are cut with a saw Cutting inserts with saw will damage the saw blade.
- Weight: 1.132 lbs/ft.

FOR INDOOR USE AND OUTDOOR USE

- Tested to accelerated UV/weathering exposure, Salt Spray Resistance, Freeze-Thaw Resistance and Washability. Ecoglo products easily passed with excellent results.

ENVIRONMENTALLY FRIENDLY

- LEED points qualified
- Recyclable; No disposable cost

ALUMINUM FINISH

- Available in Clear Anodized Aluminum Finish.
- Black, Light Bronze and, Dark Bronze Anodize finishes are available at an additional cost.

c UL us
SA33553
4HT0
UL 1994 AND ULC 572 LISTED

AutoCAD BIMready

ecoglo®
VISIBLY BETTER

888-679-4022 241 Main Street, #100, Buffalo, NY 14203 www.ecoglo.us

RF5-N30 FLAT STAIR NOSING

QUALIFIES FOR LEED POINTS

MR Credit 2: Construction Waste Management Divert from Land Fill

- Products are Aluminum based and 100% recyclable.

MR Credit 4: Recycled Content

- Products are Aluminum based and approximately 20% of the aluminum content in an Ecoglo secondary billet specification is recycled scrap. Ecoglo's Recommended Installation Adhesive for low VOC's and qualifies for Indoor Environmental Quality credits for low emitting materials: EQc4.1

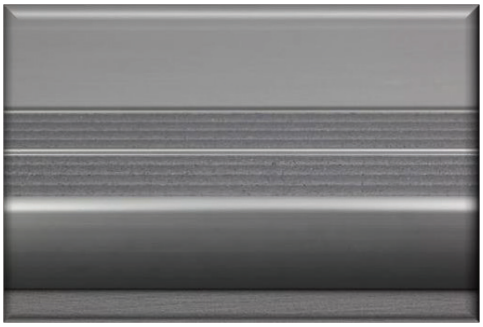
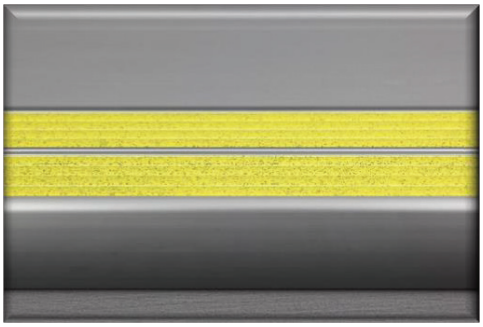

BENEFITS AND TECHNICAL DETAILS:

Ecoglo RF5-N30 meets or exceeds the performance criteria specified in the following tests or standards:

UV STABILITY

High durability indoors and outdoors.

- ASTM G155-04 Cycle 1 2000hrs, Standard Practice for Operating Xenon Arc Light Apparatus for Exposure of Nonmetallic Materials.
- Salt Spray Resistance: ASTM B117-97 500hrs, Standard Practice for Operating Salt Spray (Fog) Apparatus.
- Freeze-Thaw Resistance: ASTM C1026-87(1996), Standard Test Method for Measuring the Resistance of Ceramic Tile to Freeze-Thaw Cycling

SLIP RESISTANT

Reduces slips.

- UL410, Standard for Slip Resistance for Floor Surface Materials.
- AS/NZS 4586-1999, Slip Resistance Classification of New Pedestrian Surface Materials.

ABRASION RESISTANCE

Hard wearing.

- ASTM D1242-95a, Standard Test Methods for Resistance of Plastic Materials to Abrasion.
- ASTM F510-93(2004), Standard Test Method for Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method.
- JIS H8682-1:1999, Test methods for abrasion resistance of anodic oxide coatings on aluminum and aluminum alloys- Wheel wear test.

WASHABILITY

Easy Cleaning.

- ASTM D4828-94(2003), Standard Test Methods for Practical Washability of Organic Coatings.

FLAMMABILITY

Does not burn.

- ASTM E162-02, Standard Test Method for Surface Flammability of Materials Using a Radiant Heat Energy Source.
- ASTM D635-03, Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position.
- FAA AC 23.2 Paragraph 4.b, Horizontal Burn Test.

CONTACT ECOGLO INC. FOR A QUICK QUOTE OR TO OBTAIN MORE INFORMATION ABOUT OUR EMERGENCY LIGHTING PRODUCTS.

ecoglo®
VISIBLY BETTER